

Copyright

The interpretation right of this product specification belongs to BOE MLED. Without the signed permission of BOE MLED, any other individual or organization is not allowed, in any form, to excerpt, reproduce, copy, translate, edit or publish this product specification. This product specification is subject to modification without prior notice.

BOE

SPEC. NUMBER

-

Product Group

MLED

REV.

-

Release Date

2023.11.30

Page

1

Product Specification

BTX-FL025A

Rev. 1

BOE MLED Technology Co., Ltd.

Copyright

The interpretation right of this product specification belongs to BOE MLED. Without the signed permission of BOE MLED, any other individual or organization is not allowed, in any form, to excerpt, reproduce, copy, translate, edit or publish this product specification. This product specification is subject to modification without prior notice.

BOE

SPEC. NUMBER

-

Product Group

MLED

REV.

-

Release Date

2023.11.30


Page

2

1. Product Features

- ① Flexible PCB soft board, the bottom shell are made of superior silicone material, bending angle of the module is 120°~180°;
- ② Module adopts high refresh high grayscale IC, more uniform heat dissipation, refresh frequency can reach 3840Hz;
- ③ Module adopts 18 pcs strong magnetic adsorption mounting with good flatness, also can be finely adjusted

2. Product Image

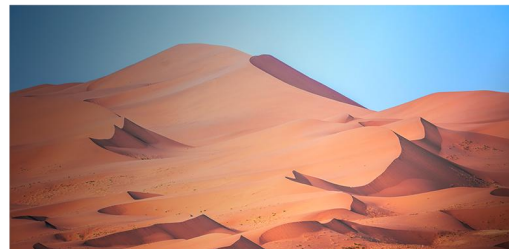

3. Main Technical Parameters

Item		Technical Parameters
Physical Parameters	Pixel Pitch(mm)	2.5
	LED Type	SMD2121
	Module Resolution(W×H)	128*64
	Module Size(W×H×D)/(mm)	320*160*7.5
	Pixel Density(dots/㎡)	160000

Copyright

The interpretation right of this product specification belongs to BOE MLED. Without the signed permission of BOE MLED, any other individual or organization is not allowed, in any form, to excerpt, reproduce, copy, translate, edit or publish this product specification. This product specification is subject to modification without prior notice.

BOE

SPEC. NUMBER

-

Product Group

MLED

REV.

-

Release Date

2023.11.30

Page

3

	Module Weight(Kg)	0.26 ± 0.05
	Module Flatness(mm)	≤0.2
	Bending Arc(°)	120~180°
	Recommended Minimum Diameter for Soft Bending Module	6 pieces for a full circle, bending not less than $\phi 611\text{mm}$
Optical Parameters	White Balance Brightness(nits)	650
	Color Temperature(K)	7500-10000 Adjustable
	Viewing Angle (Horizontal/Vertical)(°)	150/130
	Refresh Frequency(Hz)	3840
	Grayscale(bit)	≥13
	Scanning Mode	1/32
	AC Operating Voltage(V)	5
	Signal Input Interface Type	HUB75
	Maximum Power per Module (W)	21.5
Application Parameters	Application Scenarios	Indoor
	Best View Distance(m)	2.5
	Storage Temperature(°C)/ Humidity (RH)	-20℃~50℃/10%~65%
	Working Temperature(°C)/ Humidity(RH)	-10℃~40℃/10%~60%
	Protection Grade	IP30
	LED Service Time(H)	100000
	Module Maintenance Methods	Front/Rear maintenance
	Continuous Operating Time	≥7X24hrs, support continuous display

Copyright

The interpretation right of this product specification belongs to BOE MLED. Without the signed permission of BOE MLED, any other individual or organization is not allowed, in any form, to excerpt, reproduce, copy, translate, edit or publish this product specification. This product specification is subject to modification without prior notice.

BOE

SPEC. NUMBER

-

Product Group

MLED

REV.

-

Release Date

2023.11.30

Page

4

4. Plane Structure of the Product

